



DO NOT SCALE FROM DRAWING

Rev No	Revision Note	Date	Signature
01	FIRST ISSUE	27/04/01	
02	DEPTH INCREASED FROM 132.0mm TO 150.0mm	11/12/03	

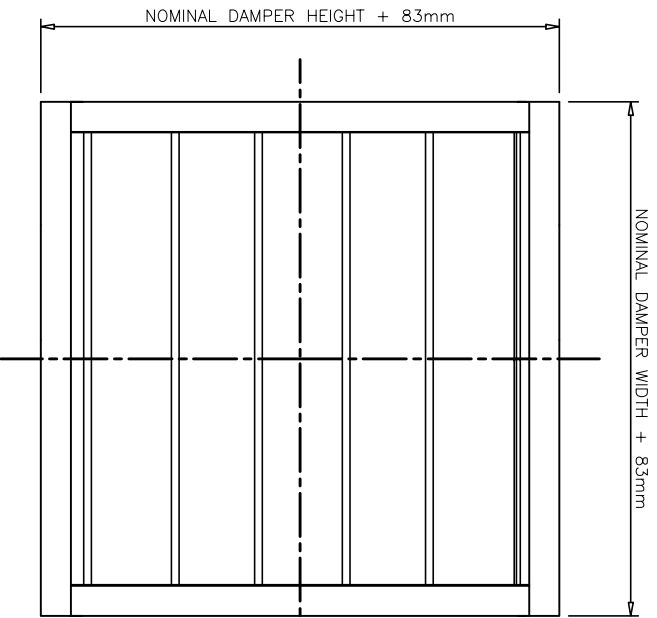

FRONT ELEVATION

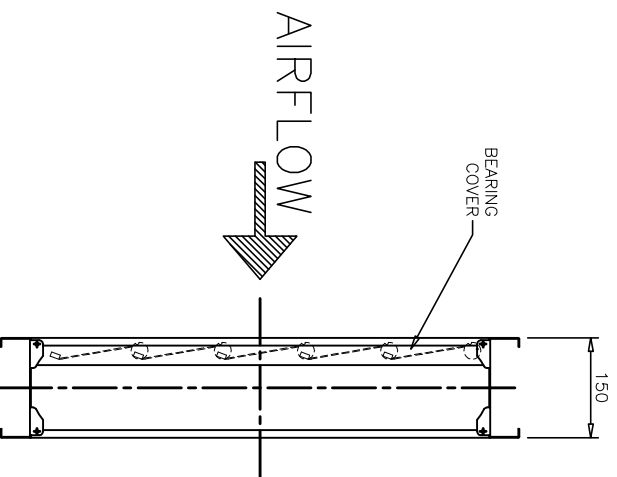

SIDE ELEVATION

NOTES:

SIZE RANGE: 100 TO 1000 WIDE x 150 TO 2050 HIGH

OPERATING CONDITIONS:

VELOCITY: 0 TO 5m/s



TEMPERATURE: -10 TO +100 deg. C

CONSTRUCTION:

CASING: 1.2mm THK. GALV., 132 DEEP AND 40mm FLANGES c/w
10mm RETURN EDGE.

BLADES: 1.6mm THK. ALUM. OR 1.2mm GALV. BLADES NOT LINKED.

BUSHES: NYLON OR OILITE.

B100	GALV.	LOW VELOCITY NON-RETURN DAMPER	Directory //CUSTOMER REFER.. /	Date 27/04/01	Scale 1:10
Drawn by M TOMLINSON		Checked by	CUSTOMER REFERENCE DRAWING		
 KONVEKTA LTD. KNOWSLEY ROAD IND. EST. HASLINGDEN, ROSSENDALE, TEL: 01706 227018 FAX: 01706 831124 E-MAIL: sales@konvektia.co.uk WEB PAGE: www.konvektia.co.uk			B100_CR01		

THIS DRAWING IS THE PROPERTY OF KONVEKTA LTD AND MUST BE RETURNED ON REQUEST. IT MUST NOT BE PASSED TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. ©