



DO NOT SCALE FROM DRAWING	1	2	3	4	5	6
Rev No	01	Revision Note	FIRST ISSUE			
Date	23/01/01	Signature				

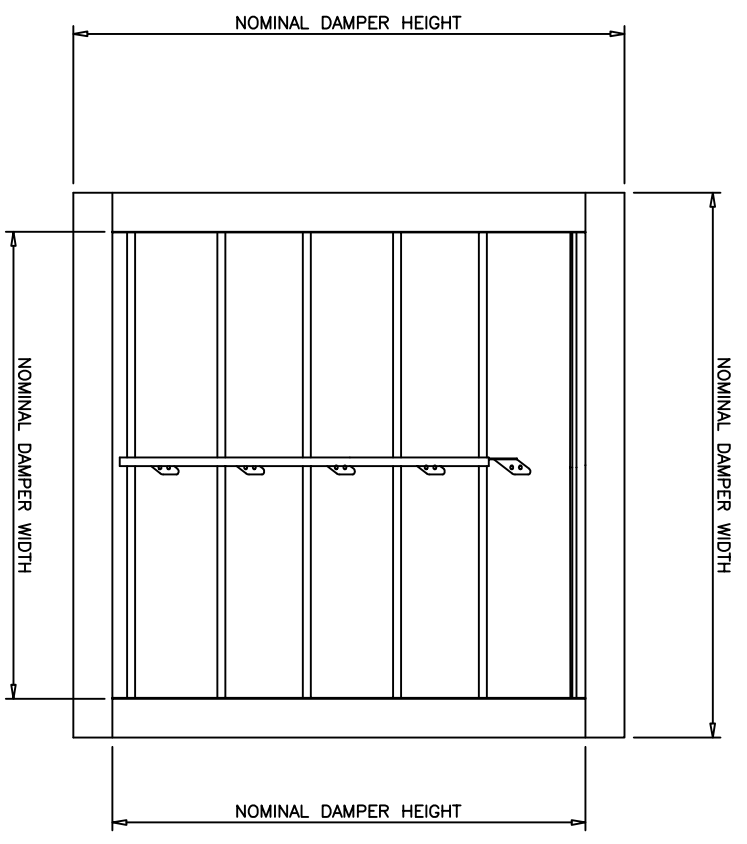

FRONT ELEVATION

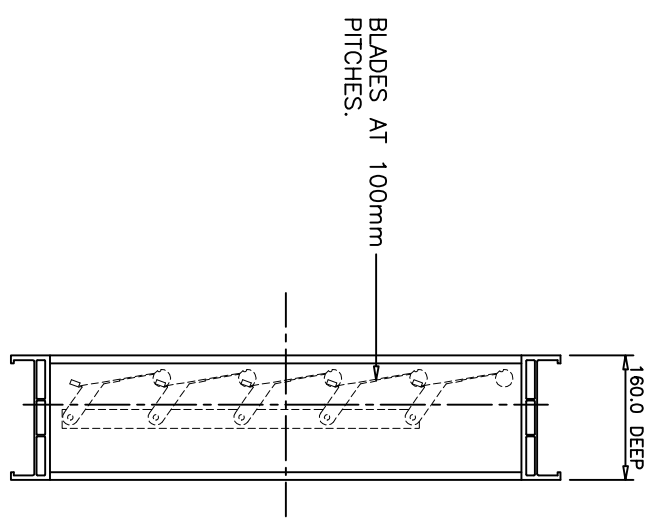

SIDE ELEVATION

NOTES:
OPERATING CONDITIONS:
VELOCITY: 5 TO 15m/s
TEMPERATURE: -10 TO +40 deg. C

CONSTRUCTION:

CASING: 6.0mm THK. DOUBLE SKIN EXTRUDED PVC. 160mm AND 50mm FLANGES c/w 10mm RETURN EDGES.
COLOUR: RAL 7011.
BLADES: 1.2mm THK. STAINLESS STEEL GRD. 316L. ALL BLADES LINKED INTERNALLY.
BUSHES: NYLON.

1 2 3 4 5 6

B200-PVC	uPVC	MEDIUM VELOCITY P.V.C. NON-RETURN DAMPER	Drawn by	M TOMLINSON	Checked by	Directory	//CUSTOMER REFER.. /	Date	23/01/01	Scale	1:10
						CUSTOMER REFERENCE DRAWING		B200-PVC_CR01			

THIS DRAWING IS THE PROPERTY OF KONVEKTA LTD AND MUST BE RETURNED ON REQUEST. IT MUST NOT BE PASSED TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. ©